

# COLD WORK TOOL STEELS

## Application Segments

---

Cold Work

## Available Product Variants

---

Long Products\*

Plates

\* Presented data refer exclusively to long products. Please observe the detailed explanations at the end of the data sheet (pdf).

## Product Description

---

BÖHLER K294 MICROCLEAR is a cold work tool steel manufactured using powder metallurgy and belongs to the group of 10% vanadium steels. The high content of vanadium carbides makes this steel highly resistant to wear. The toughness is at the same level as conventional 12% chromium steels. BÖHLER K294 MICROCLEAR is used in situations where wear resistance is the decisive factor and toughness is of secondary importance.

## Process Melting

---

Powder metallurgy

## Properties

---

- > Toughness & Ductility : good
- > Wear Resistance : very high
- > Compressive strength : very high
- > Dimensional stability : very high

## Applications

---

- > Machine knife (for producers)
- > Cold Forming
- > Fine Blanking, Stamping, Blanking
- > Screws and Barrels
- > General Components for Mechanical Engineering

## Technical data

---

Material designation	
T30111	UNS
PM A11	AISI

## Chemical composition (wt. %)

---

C	Si	Mn	Cr	Mo	V
2.45	0.90	0.50	5.20	1.30	9.70

**Material characteristics**

	Compressive strength	Dimensional stability during heat treatment	Toughness	Wear resistance abrasive	Wear resistance adhesive
<b>BÖHLER K294 MICROCLEAN</b>	★★★★★	★★★★★	★★★	★★★★★	★★★★★
<b>BÖHLER K100</b>	★★	★★	★	★★★	★★
<b>BÖHLER K105</b>	★★	★★	★	★★	★★
<b>BÖHLER K107</b>	★★	★★	★	★★★	★★
<b>BÖHLER K110</b>	★★	★★★	★	★★★	★★
<b>BÖHLER K190 MICROCLEAN</b>	★★★★	★★★★★	★★★★	★★★★	★★★★
<b>BÖHLER K340 ECOSTAR</b>	★★★	★★★	★★	★★	★★
<b>BÖHLER K340 ISODUR</b>	★★★	★★★★	★★★	★★★	★★★★
<b>BÖHLER K346</b>	★★★	★★★	★★★	★★★★	★★
<b>BÖHLER K353</b>	★★	★★★	★★	★★	★★
<b>BÖHLER K360 ISODUR</b>	★★★	★★★★	★★★	★★★★	★★★★
<b>BÖHLER K390 MICROCLEAN</b>	★★★★★	★★★★★	★★★★	★★★★★	★★★★★
<b>BÖHLER K490 MICROCLEAN</b>	★★★★	★★★★★	★★★★	★★★★	★★★★
<b>BÖHLER K497 MICROCLEAN</b>	★★★★★	★★★★★	★★★	★★★★★	★★★★★
<b>BÖHLER K888 MATRIX</b>	★★★★	★★★★★	★★★★★	★★	★★
<b>BÖHLER K890 MICROCLEAN</b>	★★★★	★★★★★	★★★★★	★★★	★★★


**Delivery condition**

<b>Annealed</b>	
Hardness (HB)	max. 277

## Heat treatment

Annealing		
Temperature	870 °C	Protect steel from scaling and decarburization. Heat through to 870 °C (1600 °F).    Controlled cooling at 15 °C (30 °F) maximum per hour to 540 °C (1000 °F),    Further cooling in furnace or air to room temperature.
Stress relieving		
Temperature	650 °C	After through heating, hold in neutral atmosphere for 2 hours.    Slow cooling in furnace to 540 °C (1000 °F)    Further cooling in air    Intended to relieve stresses caused by extensive machining or in complex shapes.
Hardening and Tempering		
Temperature	1,010 to 1,175 °C	Preheating: To minimize distortion during heating for hardening, two preheat steps are recommended. First preheat at 1200 °F (650 °C) and equalize. Second preheat at 1500-1550 °F (820-840 °C) and equalize.    Quenching: gas (N <sub>2</sub>   recommended), salt bath (200 to 250 °C or 500 to 550 °C   392 to 482 °F or 932 to 1022 °F), compressed air.    After hardening, tempering to the desired working hardness according to the tempering chart.

## Tempering chart

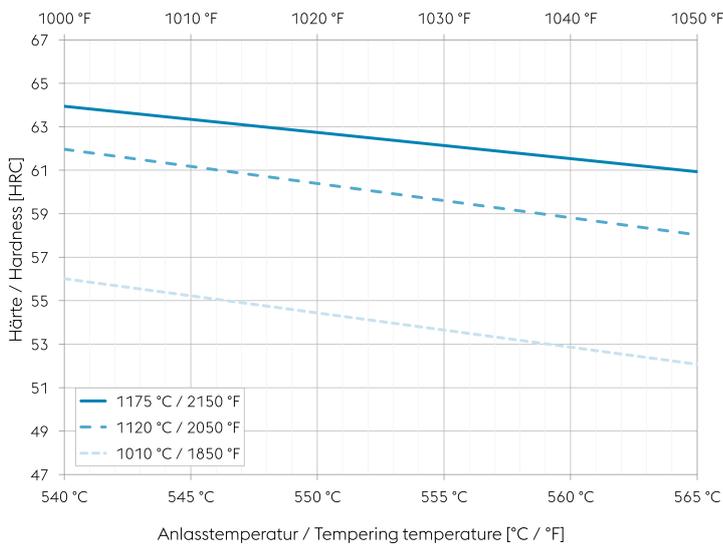

Specimen size: square 20 mm (0,787 inch)

Slow heating to tempering temperature immediately after hardening.

Time in furnace 1 hour for each 20 mm (0,787 inch) of workpiece thickness but at least 2 hours.

Please refer to the tempering chart for guide values for the achievable hardness after tempering.

It is recommended to temper at least three times above the secondary hardness maximum.

Cooling in air to room temperature after each tempering step is recommended.

Tempering for stress relieving 30 to 50 °C (86 to 122 °F) below the highest tempering temperature.

## Physical Properties

Temperature (°C)	<b>20</b>
Density (kg/dm <sup>3</sup> )	7.42
Thermal conductivity (W/(m.K))	20.39
Specific heat (kJ/kg K)	0.46
Spec. electrical resistance (Ohm.mm <sup>2</sup> /m)	-
Modulus of elasticity (10 <sup>3</sup> N/mm <sup>2</sup> )	221

**Thermal Expansions between 20°C | 68°F and ...**

Temperature (°C)	93	260	427	593
Thermal expansion (10 <sup>-6</sup> m/(m.K))	10.7	11.1	11.8	12.3

If other available product variants are listed in addition to long products, please note that these may differ in terms of melting process, technical data, delivery and surface condition as well as available product dimensions. For mandatory technical specifications, other requirements and dimensions, please contact our regional voestalpine BÖHLER sales companies. The data contained in this brochure is merely for general information and therefore shall not be binding on the company. We may be bound only through a contract explicitly stipulating such data as binding. Measurement data are laboratory values and can deviate from practical analyses. The manufacture of our products does not involve the use of substances detrimental to health or to the ozone layer.